



Level Set Collection | LVT
Natural Woodgrains

Interface®

Level Set™ Collection | Natural Woodgrains

With thoughtful consideration for design, performance and a sustainable path, we've crafted a foundational collection of luxury vinyl tiles that fit perfectly into the Interface flooring systems.

Level Set Natural Woodgrains is a selection of 25cm x 1m Skinny Planks™ in classic wood looks and a smooth finish. Natural Woodgrains is offered in a range of earthy neutrals from light to dark.

It's not only a perfect match to our Skinny Planks and square carpet tiles, it is also a perfect fit in terms of thickness. This means you can easily install our resilient and soft flooring to create an integrated floor or inset rug, and move effortlessly from surface to surface without transition strips.

We design all our products with the ability to feed ReEntry®, our reclamation program. And, of course, like all of our products made around the world, the Level Set Collection is carbon neutral—just some of the many steps we take toward creating a climate fit for life. Join the **#ClimateTakeBack** movement.



PRODUCT NATURAL WOODGRAINS COLOR A00207 WASHED WHEAT INSTALLED ASHLAR





LVT PRODUCT NATURAL WOODGRAINS COLOR A00205 STORM INSTALLED ASHLAR
FLOR PRODUCT MOD CAFÉ™ COLOR 105421 STAR LINEN INSTALLED MONOLITHIC



LVT PRODUCT NATURAL WOODGRAINS COLOR A00206 WINTER GREY
CARPET PRODUCT WORLD WOVEN | WW895 COLOR 105379 FUCHSIA WEAVE INSTALLED ASHLAR



LVT PRODUCT NATURAL WOODGRAINS COLOR A00205 STORM INSTALLED ASHLAR
FLOR PRODUCT COLLINS COTTAGE™ COLOR 105413 HOUND LINEN INSTALLED NON DIRECTIONAL





LVT PRODUCT NATURAL WOODGRAINS COLOR A00204 BEECH INSTALLED HERRINGBONE
CARPET PRODUCT WORLD WOVEN | WW895 COLOR 105375 HEATHER WEAVE INSTALLED ASHLAR

Specifications

Product Number	A002
Product Construction	High Performance Luxury Vinyl Tile
Class / ASTM F1700	Class III Printed Vinyl Plank
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25cm x 1m (9.845 in x 39.38 in)

Performance

IIC Sound Rating	(ASTM E492-09) 57 IIC
Slip Resistance	(ASTM D2047) >0.55 wet/dry, ADA Compliant
Static Load Limit	(ASTM F970) 1500 psi
Flexibility	(ASTM F137) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Radiant Flux	(ASTM E648) Class I
Smoke Density	(ASTM E662) Passes, ≤ 450
Size & Squareness	(ASTM F2055) Passes, +/- 0.016 in. per linear foot
Thickness	(ASTM F386) Passes
Dimensional Stability	(ASTM F2199) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes

Environmental

Indoor Air Quality	FloorScore®/CDPH 01350 Certified for low-VOC emissions
Material Composition	Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers
Ingredients & Life Cycle Impacts	Environmental Product Declaration
Carbon Footprint	3rd Party Verified Carbon Neutral
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD</i> and <i>EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing

Packaging

Square Feet per Carton	26.91 sq. ft. (2.5 m ²)
Pieces per Carton	10
Weight per Carton	40 lbs (18 kg)
Cartons per Pallet	40
Pallets per Truckload	20

Technical Information


Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Ashlar, Herringbone



Natural Woodgrains Colorline



A00201 BLACK WALNUT

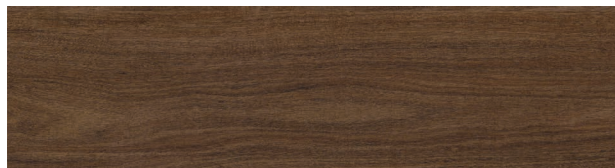

A00202 MADAGASCAR



A00203 CHESTNUT



A00204 BEECH



A00205 STORM




A00206 WINTER GREY

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ interface.com.




A00207 WASHED WHEAT

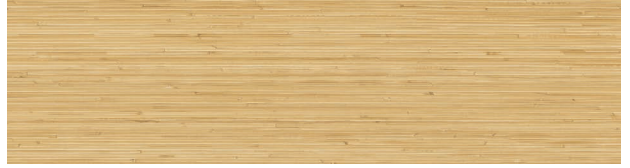

A00214 BAMBOO



A00208 SAND DUNE

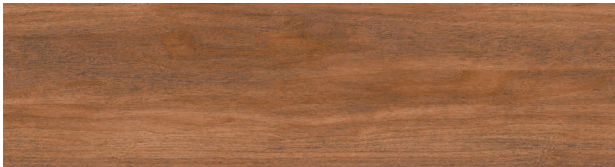

A00209 MAHOGANY




A00210 TEAK



A00211 WASHED MAPLE



A00212 CEDAR

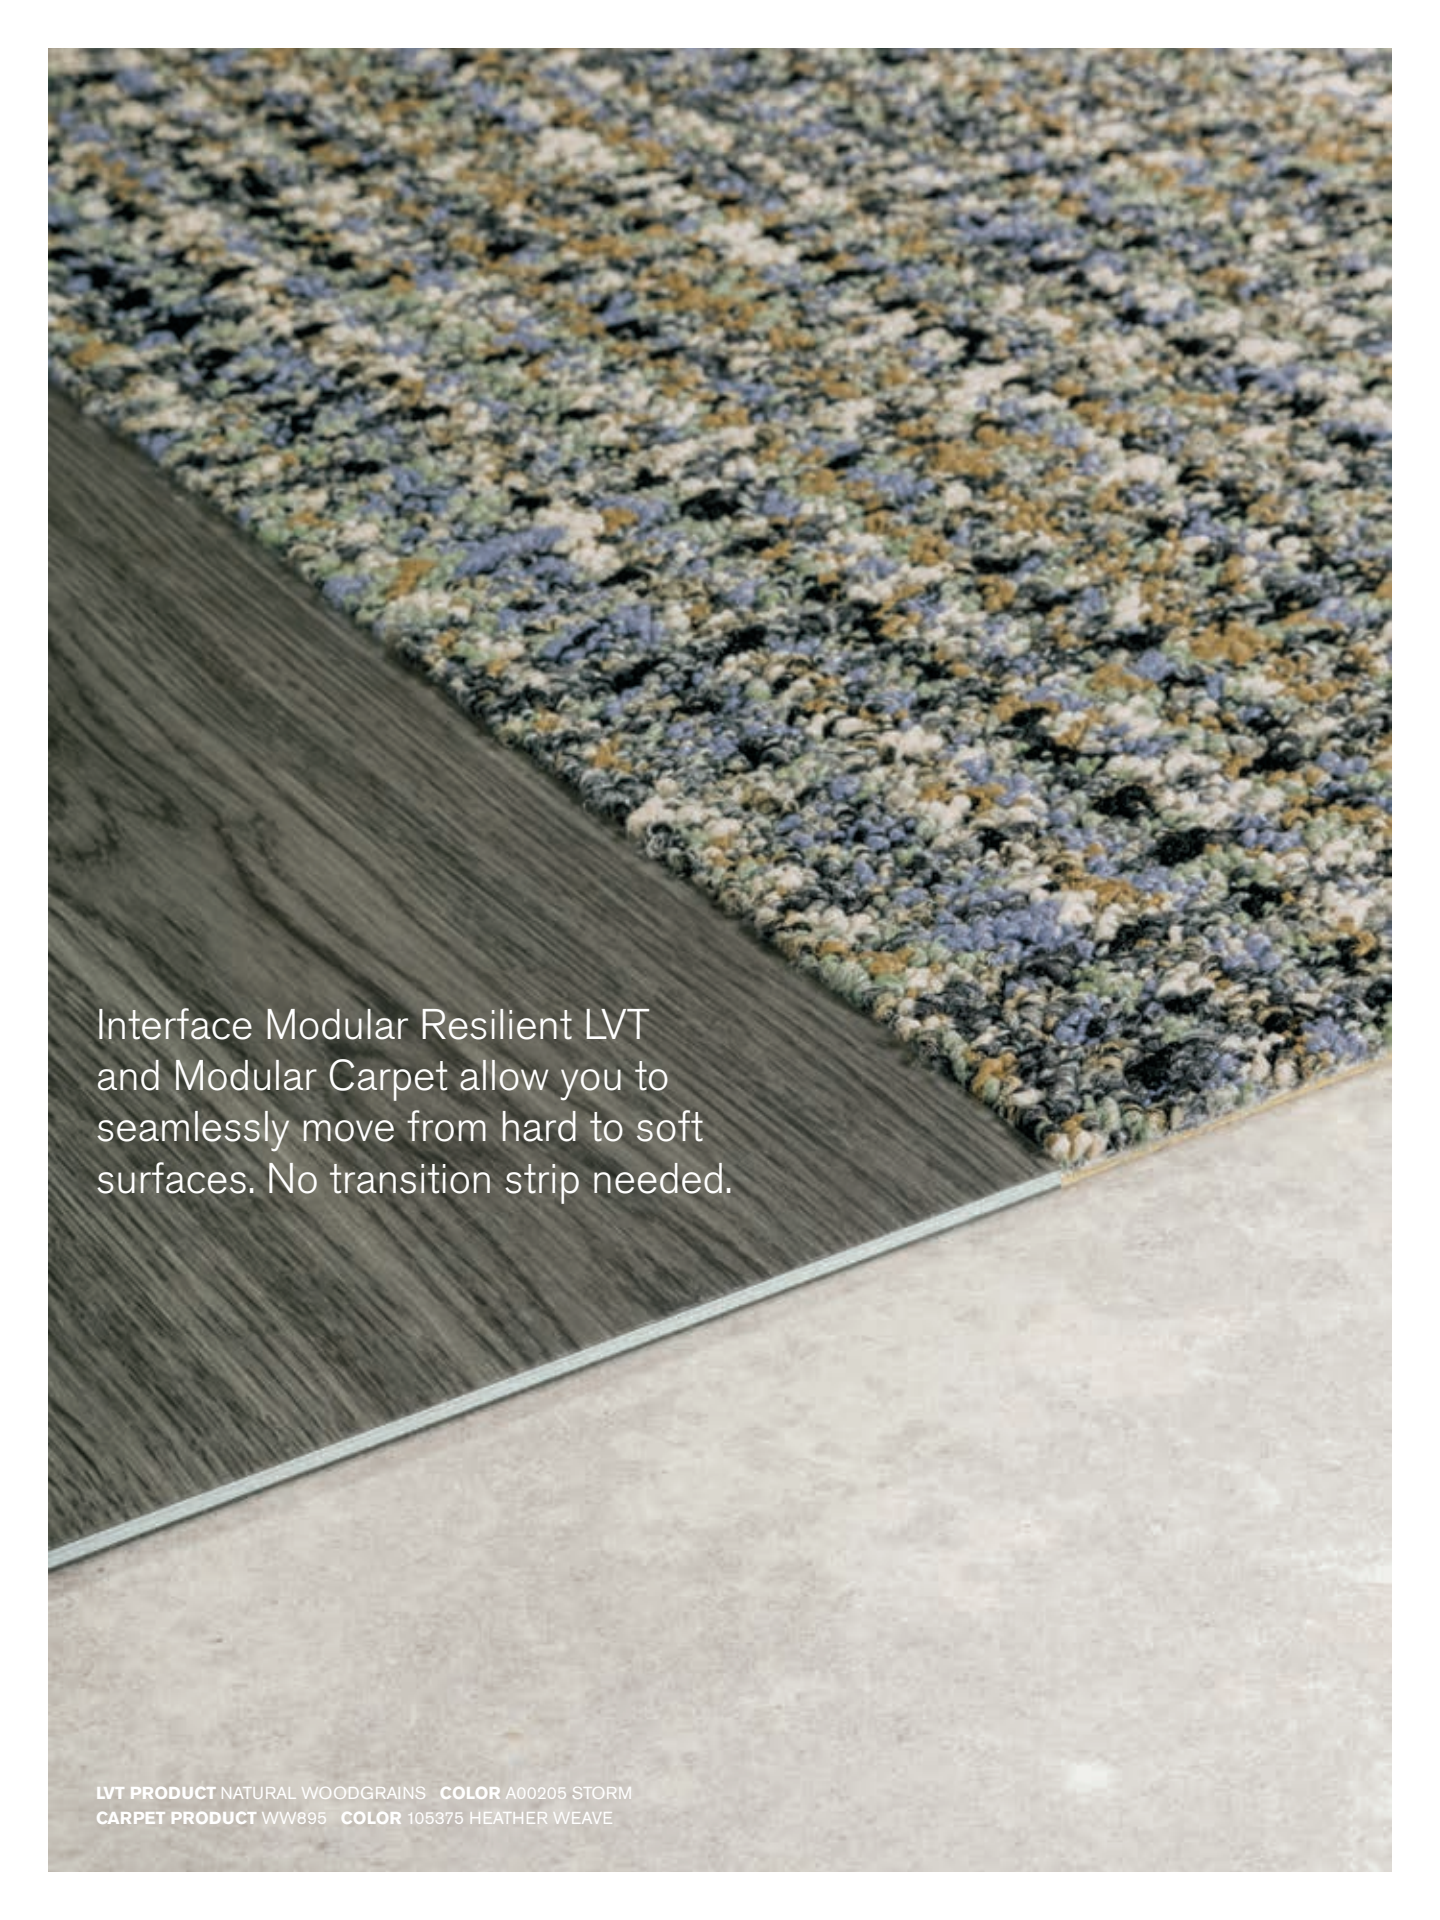

Interface Modular Resilient LVT
and Modular Carpet allow you to
seamlessly move from hard to soft
surfaces. No transition strip needed.

LVT PRODUCT NATURAL WOODGRAINS COLOR A00205 STORM
CARPET PRODUCT WW895 COLOR 105375 HEATHER WEAVE

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

Noise Reduction.

Silence distractions. Interface is helping create +Positive spaces™ with our LVT with Sound Choice backing. Sound Choice is a specially formulated backing developed for superior noise reduction, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

Why Our Modular Resilient LVT? (continued)



High Performance from Top to Bottom.

- 1. Ceramor™ Coating.** Minimizes everyday scratching and scuffing.
- 2. Wear Layer.** High quality layer enabling 15 years of resilience and performance.
- 3. Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 7. Sound Choice™.** Provides comfort and superior acoustic performance.

Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.





PRODUCT NATURAL WOODGRAINS COLOR A00203 CHESTNUT
INSTALLED ASHLAR



PLEASE RECYCLE

Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

www.interface.com

United States Headquarters

1503 Orchard Hill Road
LaGrange, GA 30240
1.800.634.6032

Canadian Headquarters

233 Lahr Drive
Belleville, ON K8N 5S2
1.800.267.2149 ext.52128

Brazilian Headquarters

Rua Surubim, 577 - Conjuntos
73/74 7º Andar
04571-050 - São Paulo - SP
+ 55 11 2196 0900

Latin American Headquarters

Montes Urales # 415 Piso 6
Col. Lomas de Chapultepec
México City, D.F. 11000
Mexico
+ 52 55 6395 5100

CIM # IFS00826 02/2019



Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.



Level Set Collection | **LVT**
Textured Woodgrains Vol.2

Interface®

The second volume of Textured Woodgrains LVT expands the colors, texture and patterning of the original Textured Woodgrains offering. These 25cm x 1m Skinny Planks™ offer six saw cut patterns and six linear patterns in a range of earthy neutrals from light to dark.

It's a perfect match to our Skinny Planks™ and square carpet tiles. Move seamlessly between our resilient and soft flooring to create an integrated floor or inset rug, without transition strips.

We design all our products with the ability to feed ReEntry®, our reclamation and recycling program. And, of course, like all of our products made around the world, the Level Set Collection is carbon neutral—just some of the many steps we take toward creating a climate fit for life. Join the **#ClimateTakeBack** movement.



LVT PRODUCT TEXTURED WOODGRAINS COLOR A00423 RUSTIC ASH INSTALLED ASHLAR
CARPET PRODUCT ICE BREAKER™ COLOR 105775 QUARRY INSTALLED NON DIRECTIONAL





LVT PRODUCT TEXTURED WOODGRAINS COLOR A00426 SUGARPINE
CARPET PRODUCT CIRCUIT BOARD™ COLOR 105951 BLUE CIRCUIT INSTALLED ASHLAR

Specifications

Product Number	A004
Product Construction	High Performance Luxury Vinyl Tile
Class / ASTM F1700	Class III Printed Vinyl Plank
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25cm x 1m (9.845 in x 39.38 in)

Performance

IIC Sound Rating	(ASTM E492-09) 57 IIC
Slip Resistance	(ASTM D2047) >0.55 wet/dry, ADA Compliant
Static Load Limit	(ASTM F970) 1500 psi
Flexibility	(ASTM F137) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Radiant Flux	(ASTM E648) Class I
Smoke Density	(ASTM E662) Passes, ≤ 450
Size & Squareness	(ASTM F2055) Passes, +/- 0.016 in. per linear foot
Thickness	(ASTM F386) Passes
Dimensional Stability	(ASTM F2199) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes

Environmental

Indoor Air Quality	FloorScore®/CDPH 01350 Certified for low-VOC emissions
Material Composition	Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers
Ingredients & Life Cycle Impacts	Environmental Product Declaration
Carbon Footprint	3rd Party Verified Carbon Neutral
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD</i> and <i>EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing

Packaging

Square Feet per Carton	26.91 sq. ft. (2.5 m ²)
Pieces per Carton	10
Weight per Carton	40 lbs (18 kg)
Cartons per Pallet	40
Pallets per Truckload	20

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Ashlar, Herringbone



All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ interface.com.

Textured Woodgrains Colorline



A00420 RUSTIC CASHEW



A00426 SUGARPINE



A00421 RUSTIC OAK



A00427 HEMLOCK



A00422 RUSTIC HICKORY



A00428 GREY ADLER




A00423 RUSTIC ASH



A00429 GREYWOOD



A00424 RUSTIC BIRCH

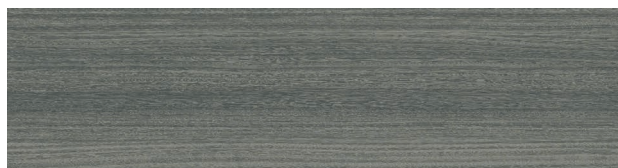


A00430 GUNMETAL ELM



A00425 RUSTIC CHARCOAL



A00431 IRONBARK



Interface Modular Resilient LVT
and Modular Carpet allow you to
seamlessly move from hard to soft
surfaces. No transition strip needed.

LVT PRODUCT TEXTURED WOODGRAINS **COLOR** A00422 RUSTIC HICKORY
CARPET PRODUCT PROGRESSION II **COLOR** 105506 EVENING DUSK

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry™ program.

Noise Reduction.

Silence distractions. Interface is helping create +Positive spaces™ with our LVT with Sound Choice backing. Sound Choice is a specially formulated backing developed for superior noise reduction, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.



High Performance from Top to Bottom.

- 1. Ceramor™ Coating.** Minimizes everyday scratching and scuffing.
- 2. Wear Layer.** High quality layer enabling 15 years of resilience and performance.
- 3. Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 7. Sound Choice™.** Provides comfort and superior acoustic performance.

Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.





PRODUCT TEXTURED WOODGRAINS COLOR A00422 RUSTIC HICKORY INSTALLED ASHLAR



Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

www.interface.com

United States Headquarters

1503 Orchard Hill Road
LaGrange, GA 30240
1.800.634.6032

Canadian Headquarters

233 Lahr Drive
Belleville, ON K8N 5S2
1.800.267.2149 ext.52128

Brazilian Headquarters

Rua Surubim, 577 - Conjuntos
73/74 7º Andar
04571-050 - São Paulo - SP
+ 55 11 2196 0900

Latin American Headquarters

Montes Urales # 415 Piso 6
Col. Lomas de Chapultepec
México City, D.F. 11000
Mexico
+ 52 55 6395 5100

CIM # IFS00832 04/2019



Climate change is undeniable. And reversible. Our mission is to prove it. **Join the #ClimateTakeBack and help create a climate fit for life.**



Level Set Collection | LVT
Textured Woodgrains

Interface®

Level Set™ Collection | Textured Woodgrains

With thoughtful consideration for design, performance and a sustainable path, we've crafted a foundational collection of luxury vinyl tiles that fit perfectly into the Interface flooring systems.

Level Set Textured Woodgrains is a selection of 25cm x 1m Skinny Planks™ in classic wood looks and a highly textured finish inspired by distressed, reclaimed and exposed finishes. Textured Woodgrains is offered in a range of earthy neutrals from light to dark.

It's not only a perfect match to our Skinny Planks and square carpet tiles, it is also a perfect fit in terms of thickness. This means you can easily install our resilient and soft flooring to create an integrated floor or inset rug, and move effortlessly from surface to surface without transition strips.

We design all our products with the ability to feed ReEntry®, our reclamation program. And, of course, like all of our products made around the world, the Level Set Collection is carbon neutral—just some of the many steps we take toward creating a climate fit for life. Join the **#ClimateTakeBack** movement.



PRODUCT TEXTURED WOODGRAINS COLOR A00409 ASH WALNUT
INSTALLED ASHLAR





LVT PRODUCT TEXTURED WOODGRAINS COLOR A00405 GREY DUNE
CARPET PRODUCT WORLD WOVEN™ | WW890 COLOR 105385 CHARCOAL DOBBY INSTALLED ASHLAR





LVT PRODUCT TEXTURED WOODGRAINS COLOR A00401 DISTRESSED WALNUT
CARPET PRODUCT WORLD WOVEN | WW880 COLOR 105359 LINEN LOOM INSTALLED ASHLAR

Specifications

Product Number	A004
Product Construction	High Performance Luxury Vinyl Tile
Class / ASTM F1700	Class III Printed Vinyl Plank
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25cm x 1m (9.845 in x 39.38 in)

Performance

IIC Sound Rating	(ASTM E492-09) 57 IIC
Slip Resistance	(ASTM D2047) >0.55 wet/dry, ADA Compliant
Static Load Limit	(ASTM F970) 1500 psi
Flexibility	(ASTM F137) Passes
Resistance to Heat	(ASTM F1514) Passes
Resistance to Light	(ASTM F1515) Passes
Radiant Flux	(ASTM E648) Class I
Smoke Density	(ASTM E662) Passes, ≤450
Size & Squareness	(ASTM F2055) Passes, +/- 0.016 in. per linear foot
Thickness	(ASTM F386) Passes
Dimensional Stability	(ASTM F2199) Passes
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes

Environmental

Indoor Air Quality	FloorScore®/CDPH 01350 Certified for low-VOC emissions
Material Composition	Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers
Ingredients & Life Cycle Impacts	Environmental Product Declaration
Carbon Footprint	3rd Party Verified Carbon Neutral
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: <i>Low Emitting Materials</i> ; M&R: <i>EPD</i> and <i>EPR</i>
End of Life	Fully Recyclable LVT to Carpet Tile Backing

Packaging

Square Feet per Carton	26.91 sq. ft. (2.5 m ²)
Pieces per Carton	10
Weight per Carton	40 lbs (18 kg)
Cartons per Pallet	40
Pallets per Truckload	20

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)
Warranty	15 Year Limited Commercial Warranty
Installation Methods	Ashlar, Herringbone



Textured Woodgrains Colorline



A00401 DISTRESSED WALNUT



A00402 DISTRESSED CASHEW



A00403 DISTRESSED HICKORY



A00404 DISTRESSED BLACK WALNUT



A00405 GREY DUNE



A00406 ANTIQUE LIGHT OAK

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ interface.com.



A00407 WHITE WASH



A00415 ANTIQUE OAK



A00408 ANTIQUE GRAY OAK



A00416 ANTIQUE DARK OAK




A00409 ASH WALNUT



A00417 SILVER DUNE



A00410 SILVER WALNUT

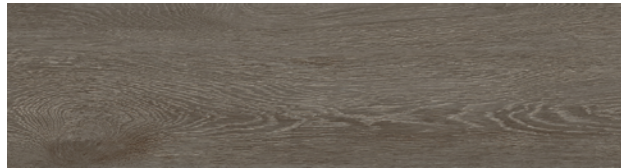

A00418 CHARCOAL DUNE



A00411 DARK WALNUT




A00412 RECLAIMED HICKORY





LVT PRODUCT TEXTURED WOODGRAINS COLOR A00415 ANTIQUE OAK
CARPET PRODUCT VISUAL CODE™ | OVEREDGE™ COLOR 105958 B&W OVEREDGE INSTALLED ASHLAR



Interface Modular Resilient LVT
and Modular Carpet allow you to
seamlessly move from hard to soft
surfaces. No transition strip needed.

LVT PRODUCT NATURAL WOODGRAINS COLOR A00205 STORM
CARPET PRODUCT WW895 COLOR 105375 HEATHER WEAVE

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

Noise Reduction.

Silence distractions. Interface is helping create +Positive spaces with our LVT with Sound Choice™ backing. It's Quiet Mark™ certified for its superior noise reduction qualities, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.



Why Our Modular Resilient LVT? (continued)



High Performance from Top to Bottom.

- 1. Ceramor™ Coating.** Minimizes everyday scratching and scuffing.
- 2. Wear Layer.** High quality layer enabling 15 years of resilience and performance.
- 3. Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6. Core Sheet.** Creates a thickness for a stronger core and reduces telegraphing from beneath.
- 7. Sound Choice™.** Provides comfort and superior acoustic performance.

Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.





PRODUCT TEXTURED WOODGRAINS **COLOR** A00417 SILVER DUNE **INSTALLED** ASHLAR



PLEASE RECYCLE

Printed on 50% post consumer waste (PCW) fiber manufactured using wind power.

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

www.interface.com

United States Headquarters

1503 Orchard Hill Road
LaGrange, GA 30240
1.800.634.6032

Canadian Headquarters

233 Lahr Drive
Belleville, ON K8N 5S2
1.800.267.2149 ext.52128

Brazilian Headquarters

Rua Surubim, 577 - Conjuntos
73/74 7º Andar
04571-050 - São Paulo - SP
+ 55 11 2196 0900

Latin American Headquarters

Montes Urales # 415 Piso 6
Col. Lomas de Chapultepec
México City, D.F. 11000
Mexico
+ 52 55 6395 5100

CIM # IFS00827 02/2019



Climate change is undeniable. And reversible. Our mission is to prove it. **Join the #ClimateTakeBack and help create a climate fit for life.**