


fogo

8051.01 - 8051.16

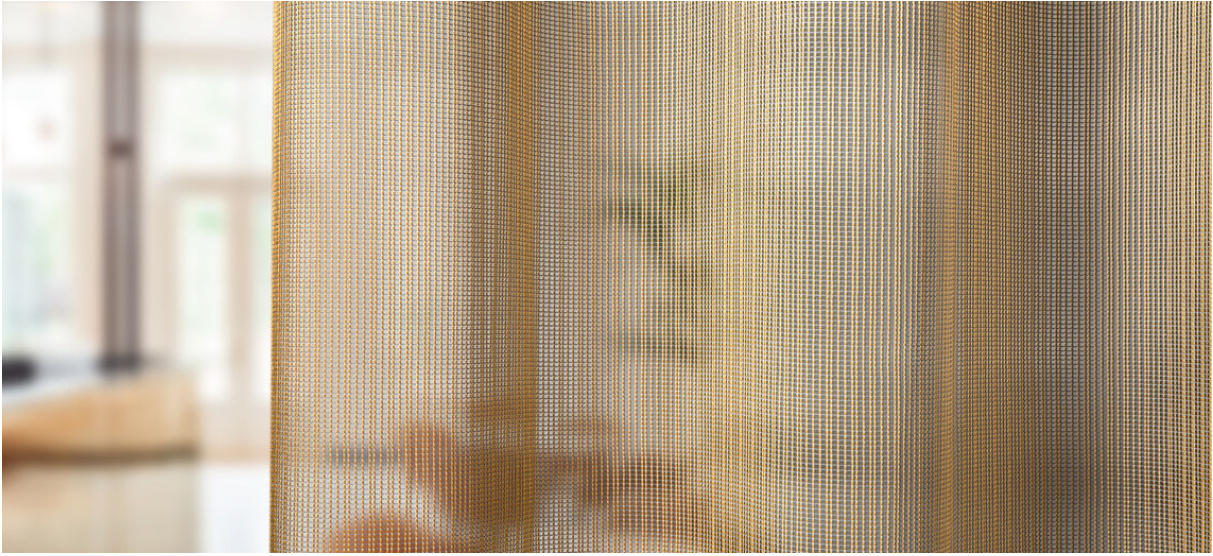

binder
curtain
03

sheer/transparent

descripción
semitransparente con efecto longitudinal

composición
100% poliéster ignífugo

ancho
± 304 cm, ± 120 inches

peso
± 362 gr/m¹, ± 12 oz/yd¹ fabrics

confort visual & térmico
EN 410/EN 14501

combustión retardada
EN 13773, class 1
BS 5867 - 2, type C
NF P 92 / 503 - 507, M1
DIN 4102, B1
UNI VF 8456 - 8457, classe 1
IMO 2010 FTP part 7
NFPA 701
CAN ULC S109

resistencia al frotamiento
ISO 105 X12
mojado 4-5 / seco 4-5 (escala 1-5)
AATCC 8
mojado 5 / seco 5 (escala 1-5)

insensibilidad a la luz

ISO 105 B02
6 (escala 1-8)
AATCC 16.3: 60 hours
5 (escala 1-5)

mantenimiento



carencia: lizo -3.1% / trama -0.5%



carencia: lizo -3.8% / trama -0.8%



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
S07-0023 HOHENSTEIN HTTI

Tested for harmful substances.
www.oeko-tex.com/standard100




International Association of Textile and Apparel Technicians (IATAT)
Innovations in Textile and Apparel Technology

fogo

8051.01 - 8051.16



8051.01



8051.02




8051.03




8051.04



8051.05



8051.06



8051.07



8051.08



8051.09



8051.10




8051.11



8051.12




8051.13



8051.14



8051.15



8051.16